


印制板开孔尺寸(±0.1mm)

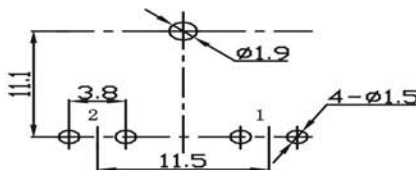

未注公差尺寸

|      |      |      |
|------|------|------|
| ≤6   | ≥10  | >10  |
| ±0.1 | ±0.2 | ±0.3 |

|                    |     |     |                        |
|--------------------|-----|-----|------------------------|
| 型号                 | 配线图 | 端子数 | 安全认证                   |
| 按钮开关<br>KAG-03C12T |     | 2P  | UL; TUV; CE<br>EK; CQC |

电源参数: 12(10)A 250V AC 15A 125V AC  
 接触电阻: ≤50mΩ  
 绝缘电阻: ≥100MΩ  
 介电强度: 极与极1500VAC, 极与壳3000VAC  
 环境温度: T125  
 电气寿命: 1E4



上海昕满电子有限公司